


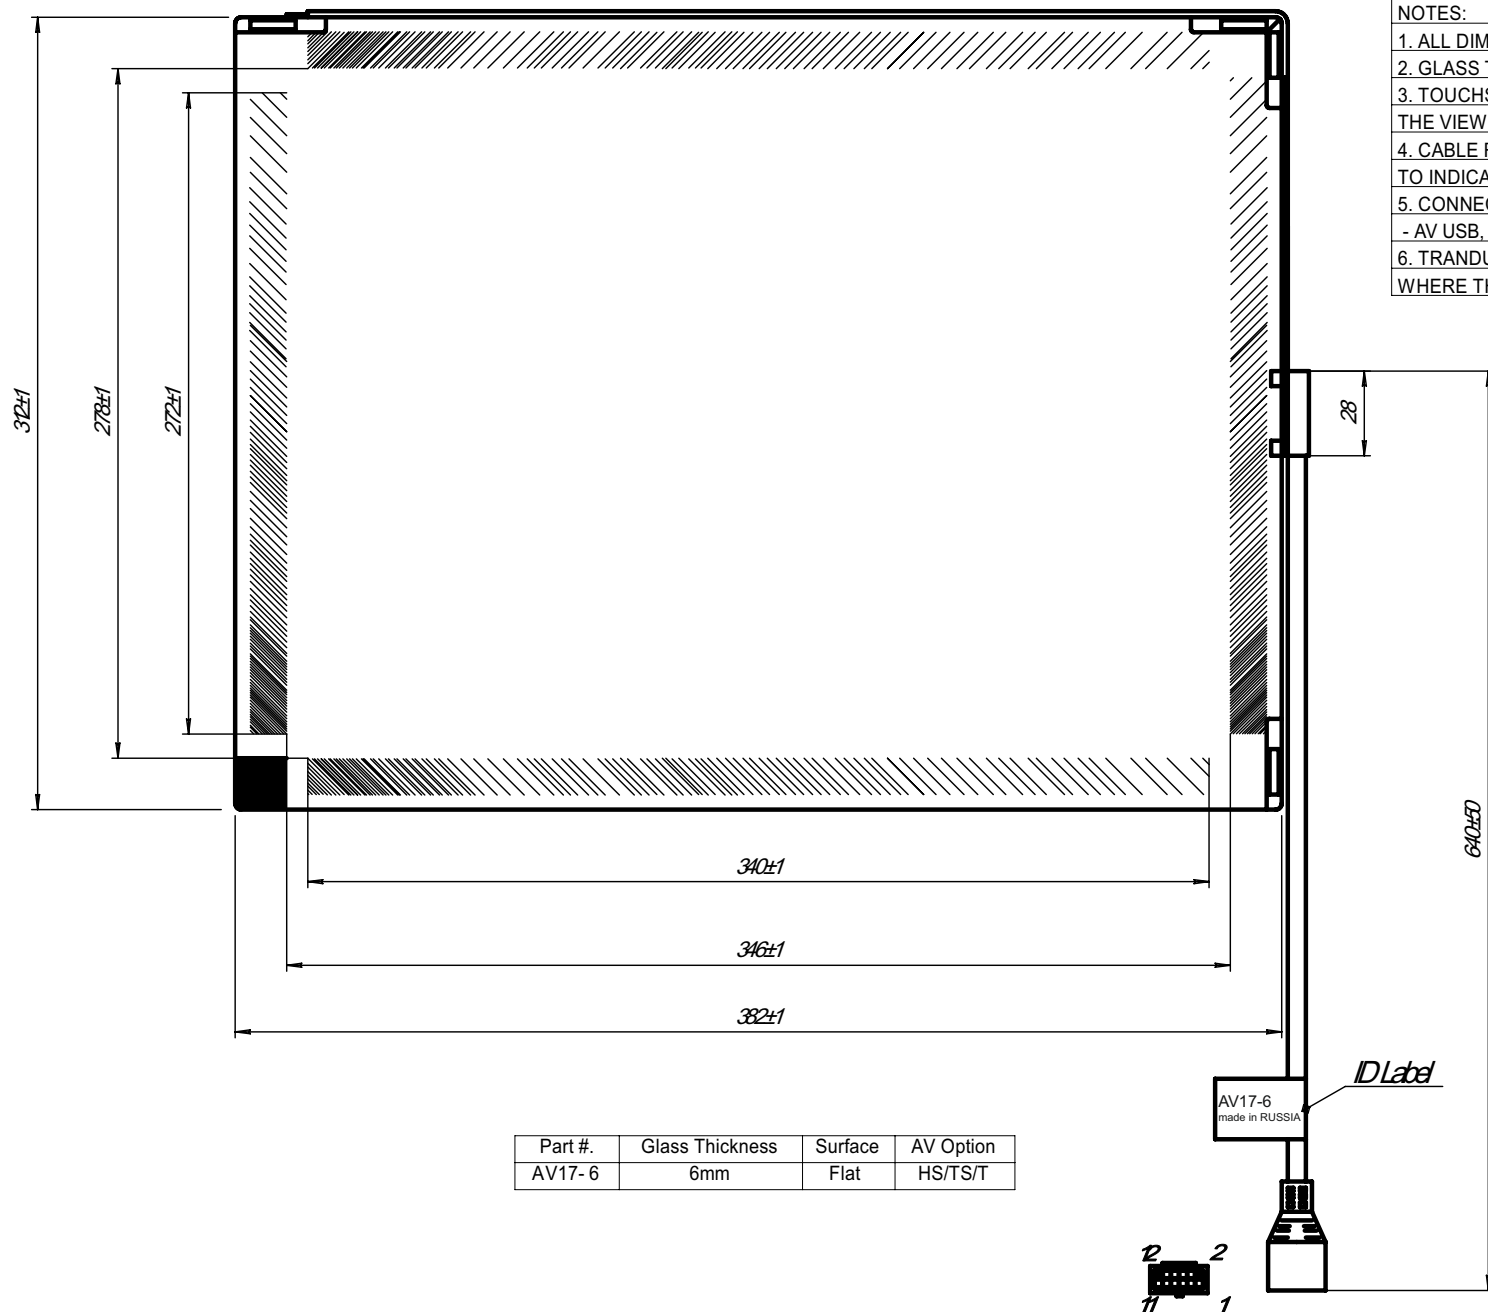

NOTES:	
1.	ALL DIMENSIONS ARE IN MILLIMETERS
2.	GLASS THICKNESS: 1/12mm NOMINAL
3.	TOUCHSCREEN ACTIVE AREA IS LESS THAN THE VIEWABLE AREA TO FACILITATE SEALING
4.	CABLE ROUTING ADDS A MAXIMUM OF 0.2/2.5mm TO INDICATED GLASS DIMENSIONS
5.	CONNECTOR MATES WITH ANY OF THE FOLLOWING:
	- AV USB, AV RS232, AV USB-RS232.
6.	TRANSDUCERS ARE LOCATED AT THE POSITIONS WHERE THE GLASS IS BEVELED.

Part #.	Glass Thickness	Surface	AV Option
AV17- 6	6mm	Flat	HS/TS/T

CONNECTOR	
PIN	SIGNAL
1	GROUND
2	KEY
3	Y RECEIVE(+)
4	Y TRANSMIT(+)
5	Y RECEIVE(-)
6	Y TRANSMIT(-)
7	GROUND
8	X TRANSMIT(-)
9	X RECEIVE(-)
10	X TRANSMIT(+)
11	X RECEIVE(+)
12	KEY

Model: **AV17-6**
AVIOR
 DATE: 2014-07
 made in RUSSIA